REV.	DESCRIPTION	ENG.	APPROVAL

CURRENT RATING: 5 AMPS
DIELECTRIC:
AC 1000V MIN. (1 MINUTE)
INSULATOR RESISTANCE:
1000OHMS MIN (500V DC)
INSULATOR MATERIAL:
NYLON, UL94V-0
TEMPERATURE: -55 °C TO 105 °C

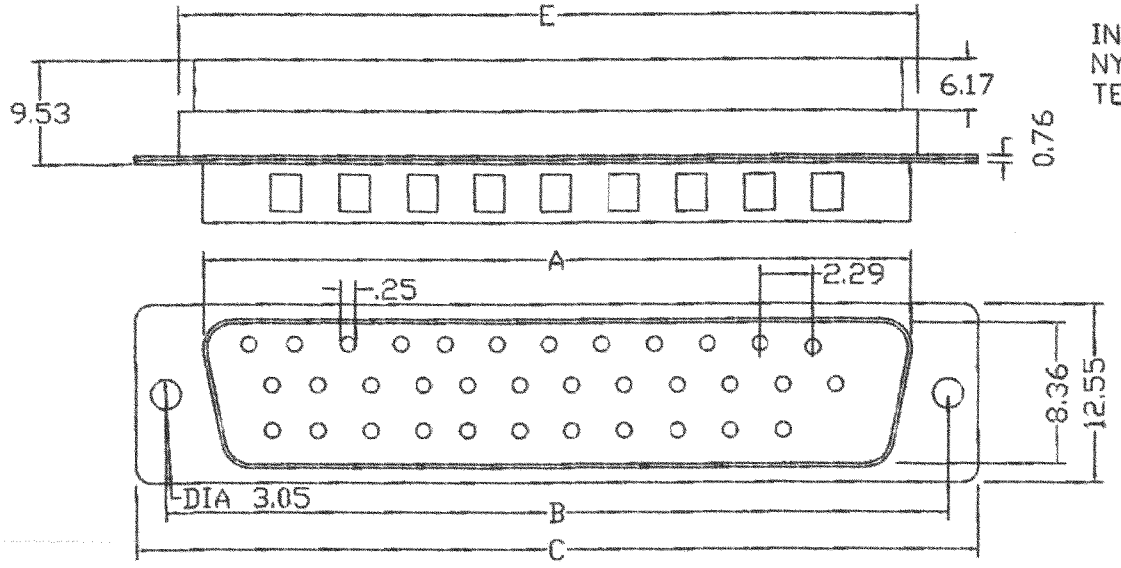



POSITIONS	A	B	C	E
25	38.38	47.04	53.04	41.30

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	SHEEL	STEEL	NICKEL		

THIS DRAWING AND THE SPECIFICATIONS ARE THE PROPERTY OF STEREN ELECTRONICS INTERNATIONAL, L.L.C. AND SHALL NOT BE COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN PERMISSION FROM STEREN.

DIMENSIONS	TOLERANCE
0 TO 25MM	+/-0.10MM
25 TO 100MM	+/-0.12MM
100 TO 200MM	+/-0.15MM
200MM AND UP	+/-0.20MM

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS AND ANGULAR TOLERANCE IS +/- 1/2°

SKU NO. 500-127

STEREN ELECTRONICS

TITLE
25C D-SUB FEMALE CRIMP

SCALE

DRAWING NO.

DRN BY:CURUMIYA
DATE:5/20/98

CHK BY: T.B.
DATE: 5/20/98

APPR. BY
DATE:

FILE NAME

SHEET 1/1